


## Model E4-401S

Operating range Arm length 400mm Joint#3 stroke 130mm

Payload Rated 1kg/Maximum 4kg

Standard cycle time 0.33 sec



Cycle time based on round-trip arch motion (300mm horizontal, 25mm vertical) with 2kg payload (path coordinates optimized for maximum speed)

Repeatability  $\pm 0.01\text{mm}$   $\pm 0.01\text{mm}$   $\pm 0.01^\circ$   
 Joint #1,#2 Joint #3 Joint #4







### Parameters of each axis

Joint Content	#1	#2	#3	#4
MAX Operating Speed	6237 mm/s		1100 mm/s	2600°/s
MAX Motion Range	$\pm 225^\circ$	$\pm 225^\circ$	130mm	$\pm 720^\circ$
Motor Power Consumption	400W	400W	100W	100W
Joint#3 down force			150N	
Weight	20kg (cables not included)			

Joint #4 allowable moment of inertia, rate 0.005kg·m<sup>2</sup>, maximum 0.05kg·m<sup>2</sup>

Electrical parameters	Origin Return	None Need Origin Return
Installed wire for customer	15Pin (D-Sub Connector)	
Installed pneumatic tube for customer use	$\phi 4\text{mm} \times 1$ , $\phi 6\text{mm} \times 2$	
Visual Interface	-	
Installation Environment	Standerd/Clean (Customized)	

### Outer Dimensions and Motion Range

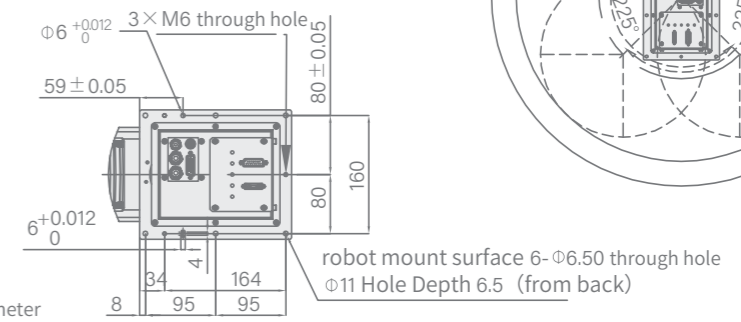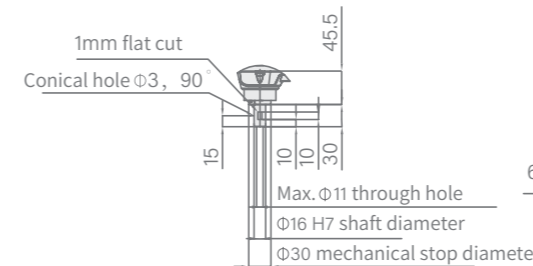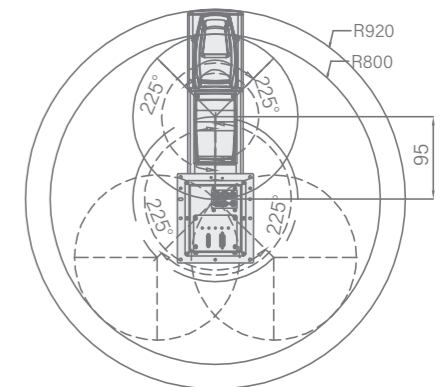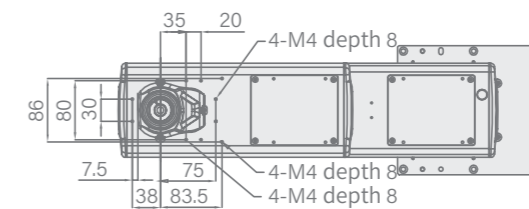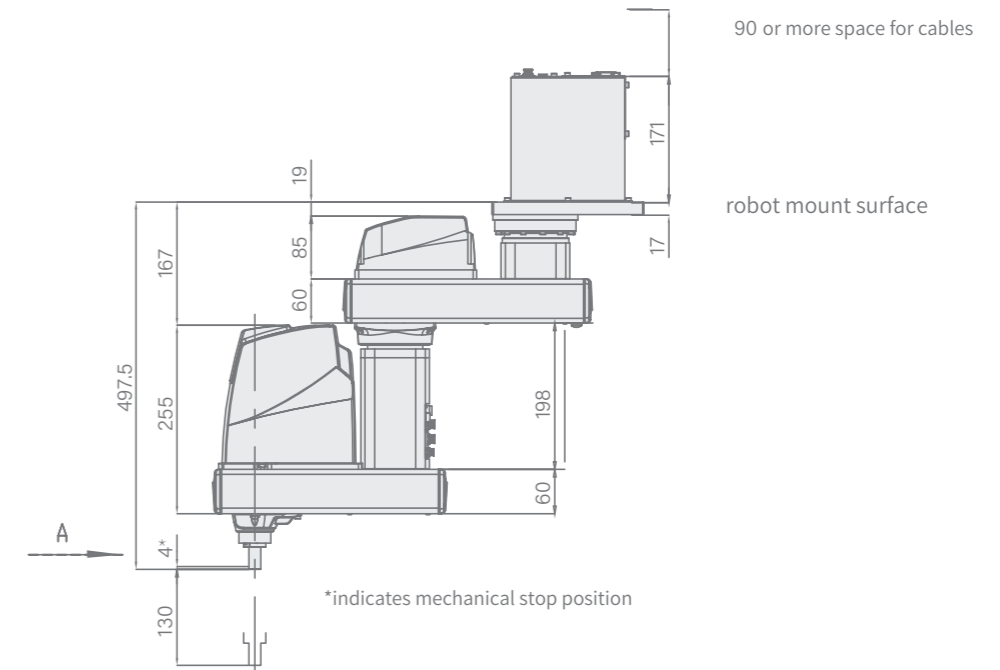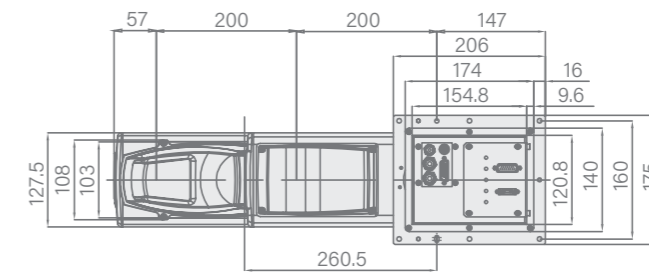

Detailed view from A

datum through hole (Bottom view of the base)